



Jarwo BV

Postbus 69, 3440 AB Woerden
Marconiweg 17, 3442 AD Woerden
The Netherlands
Tel. +31-348-400068
Fax +31-348-400168
E-mail: info@jarwo.nl

Packaging machines 250 / 350

These packaging machines are ideal for packing bulk goods in rolled packaging material. They also offer a wide range of other packaging options, including block bottom bags, re-sealable bags, gas and vacuum packaging.

Every machine is adapted to your own needs in order to guarantee a continual packaging process with the best possible product handling. The packaging machines can be synchronized with any weighing or measuring system, or can be filled manually. Naturally, they meet all CE safety.

250

Technical specifications:

Bag width: **80 - 250 mm.**

Bag length, in one seal step: up to **450 mm.**

Speed: up to **60** packs per minute.

Weight: **350 kilo.**

Dimensions: L = **1955 mm,**

H = **1795 mm,**

B = **1000 mm.**



350

Technical specifications:

Bag width: **150 - 350 mm.**

Bag length, in one seal step: up to **450 mm.**

Speed: up to **45** packs per minute.

Weight: **480 kilo.**

Dimensions: L = **2450 mm,**

H = **1895 mm,**

B = **1320 mm.**

Options: Heat-seal (+ punching device), Multi-seal (+ punching device), MAP-connection, Vacuum unit, Chain-bags, Side-gusseted bag unit, Block bottom bag unit, Printer systems & Labeling systems.

Visit our website www.jarwo.nl



Jarwo BV

Postbus 69, 3440 AB Woerden
Marconiweg 17, 3442 AD Woerden
The Netherlands
Tel. +31-348-400068
Fax +31-348-400168
E-mail: info@jarwo.nl

Lay-out packaging 250 & weighing machine 2009PC




Visit our website www.jarwo.nl



Jarwo BV

Postbus 69, 3440 AB Woerden
Marconiweg 17, 3442 AD Woerden
The Netherlands
Tel. +31-348-400068
Fax +31-348-400168
E-mail: info@jarwo.nl

Weighing & filling for peeled potatoes

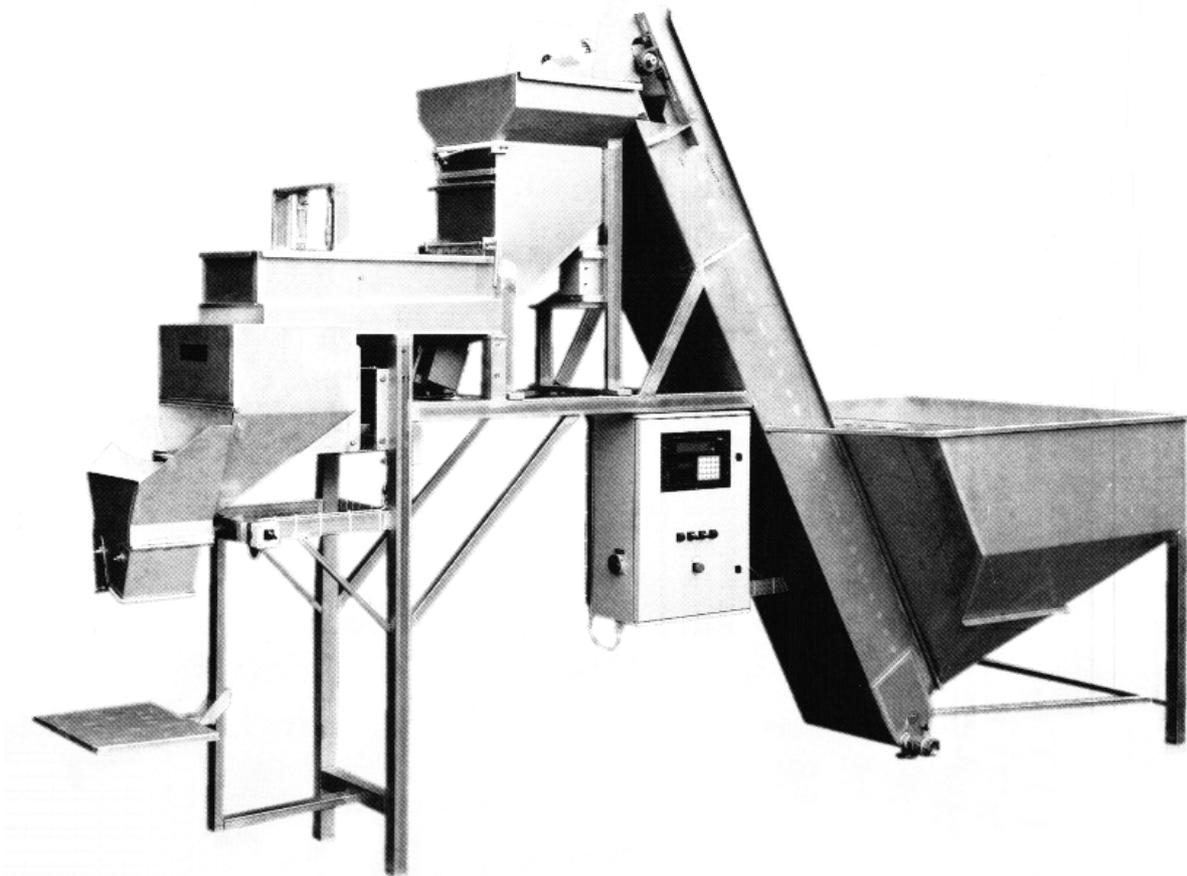

Features:

Simple to operate and to maintain.
Vibrator dosing for optimal accuracy.
Electronic weighing from 0,5 – 25 kg.

Optional:

Buffer feeding conveyor linked to the weighing unit.

Visit our website www.jarwo.nl